




# Product data sheet **KN22T**

Backing	Fibre 0,6 mm
Bonding	Synthetic resin
Grain	Corundum
Coating	Dense
Application area	Metal
Application	Portable machine sanding
Advantages	Vulcanized fibre with resin bond aluminium oxide grain.

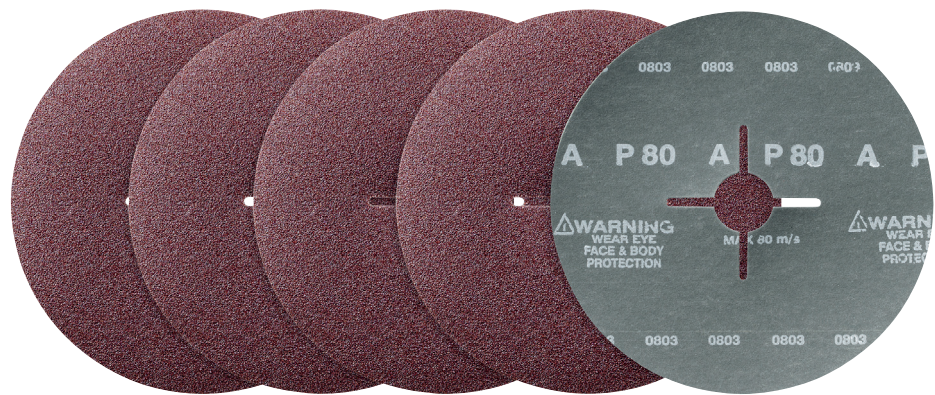

## Körnungsbereich

16	20	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	900	1000	1200	1500
----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------

## Einsatzbereich



Portable machine sanding

## Lieferformen



Discs

**AWUKO ABRASIVES**  
 Wandmacher GmbH & Co. KG  
 Hedemündener Straße 9  
 34346 Hann. Münden

info@awuko.com  
 www.awuko.com