



Product data sheet **SU22SY** panel express


Backing	Cloth polyester heavy, capable of segmentation, antistatic							
Bonding	Synthetic resin							
Grain	Silicon carbide							
Coating	Dense							
Application area	Wood (chipboards, MDF-, HDF-, OSB-boards, HPL-boards, cement fibre boards, gypsum fibre boards, stone, rubber and plastics)							
Application	Wide-belt grinding machines							
Advantages	Universal product for wood and metal working, exceptional thanks to its tear resistance - also suitable for wet grinding. The production width of 2050 mm allows large wide belts, with few joints, to be produced. Example: Wide belt: 2030 mm with only one joint or a segmented belt with 3400 mm width and 3800 mm length with only two joints, larger belts with correspondingly few joints.							
Recommendation	HDF	MDF	OSB	Cement fibre	Chipboard	Plywood	Solid wood	HPL
Calibration grind	●	●	●	●	●	●★	●★	●
Intermediate grind	●	●	●	●	●	●★	●★	●
Final Grind	●	●	●	●★	●	●★	●★	●
Roughening								●



Available as a jumbo roll
in 3 working widths:

- 1450 mm
- 1650 mm
- 2050 mm

- Higher and faster chip removal power
- Excellent for fine grinding with high demands
- ★ Exceptional cases

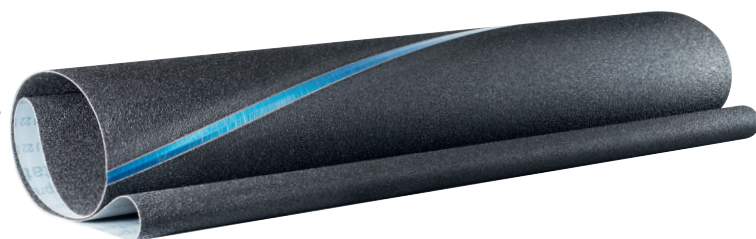

Available grits

16 20 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 900 1000 1200 1500

Application



Stationary machine sanding

Product range



Rolls



Wide belts



Segment

Segment belts

AWUKO ABRASIVES

Wandmacher GmbH & Co. KG
Hedemündener Straße 9
34346 Hann. Münden

info@awuko.com
www.awuko.com